

FIG. 1C

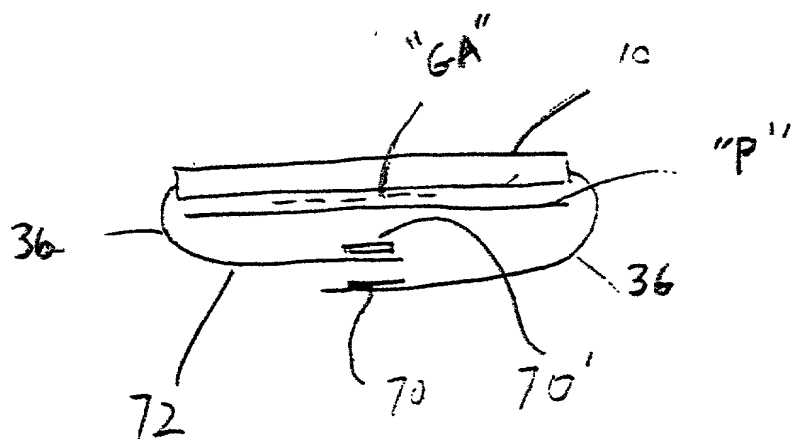


FIG. 1F

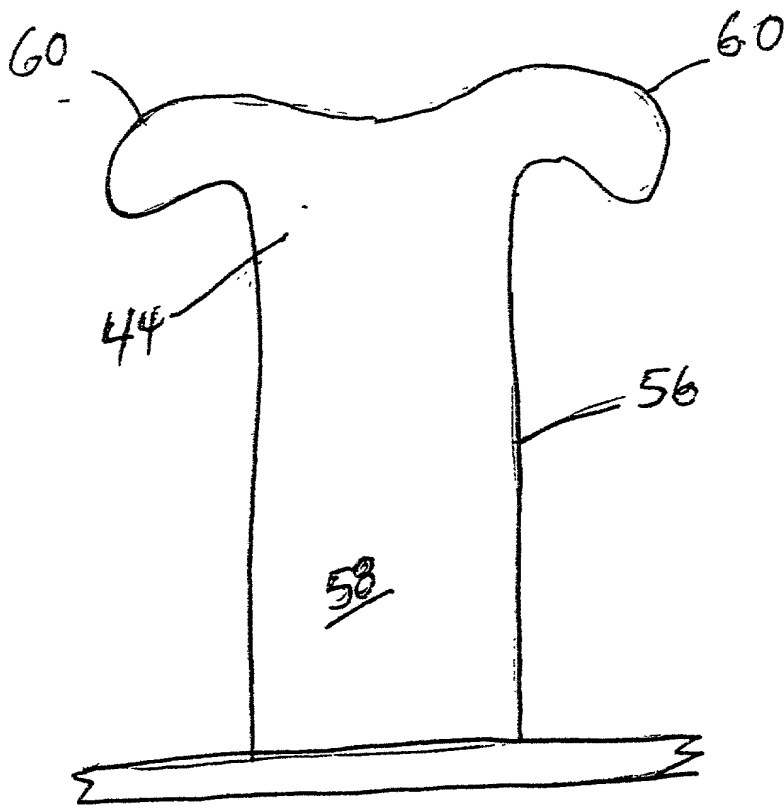


FIG. 2A

FIG. 1 is a perspective view of a circular container. It features a dashed inner circle and a solid outer circle, both labeled 60. A solid line, labeled 55, represents the rim or edge of the container.

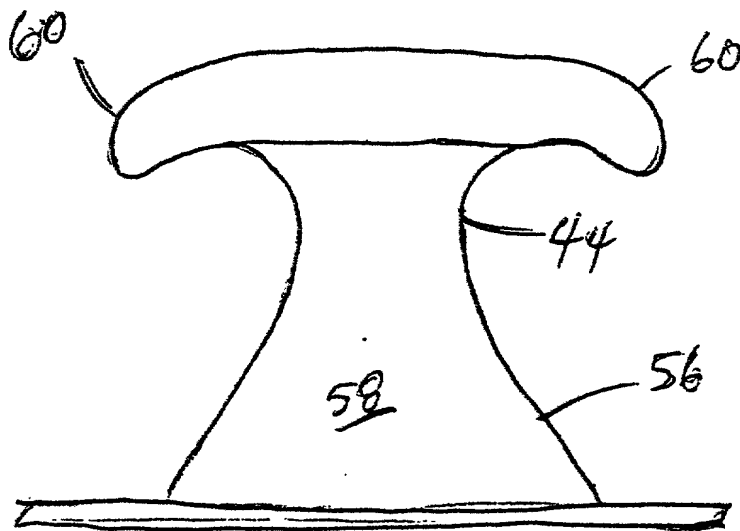


FIG. 2C'

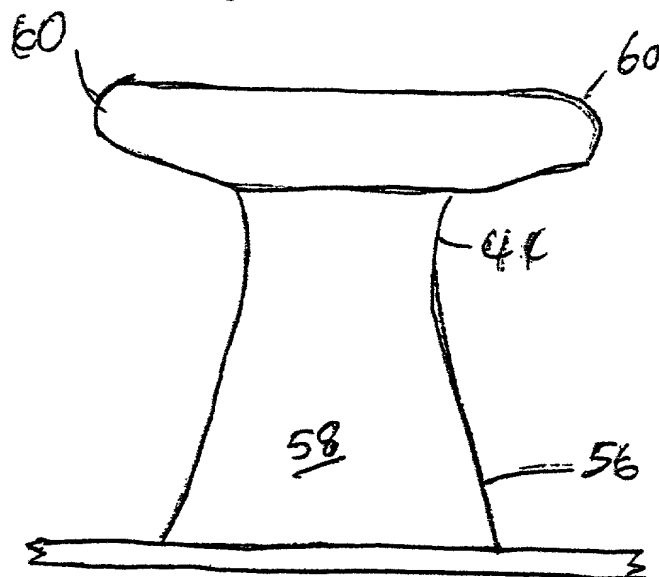


FIG. 2C

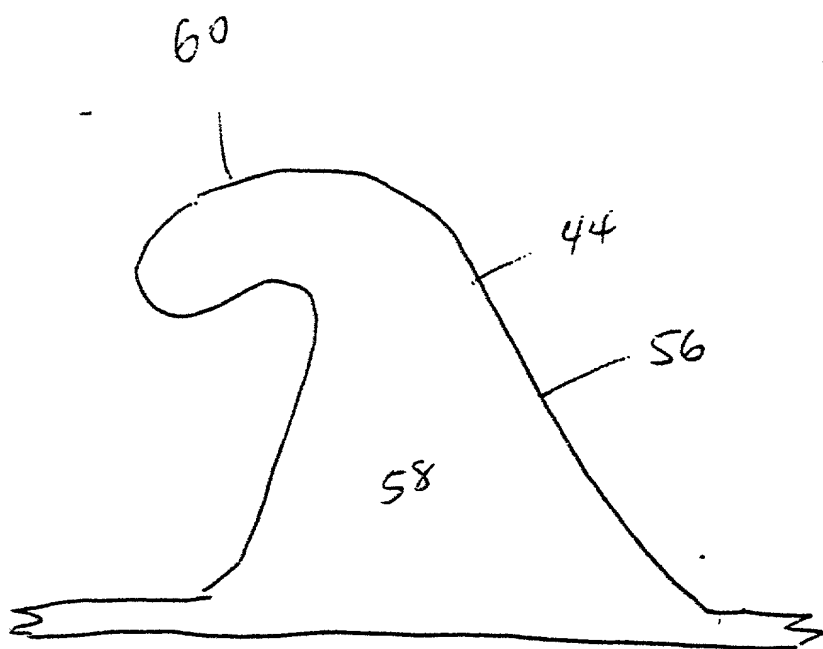


FIG. 20

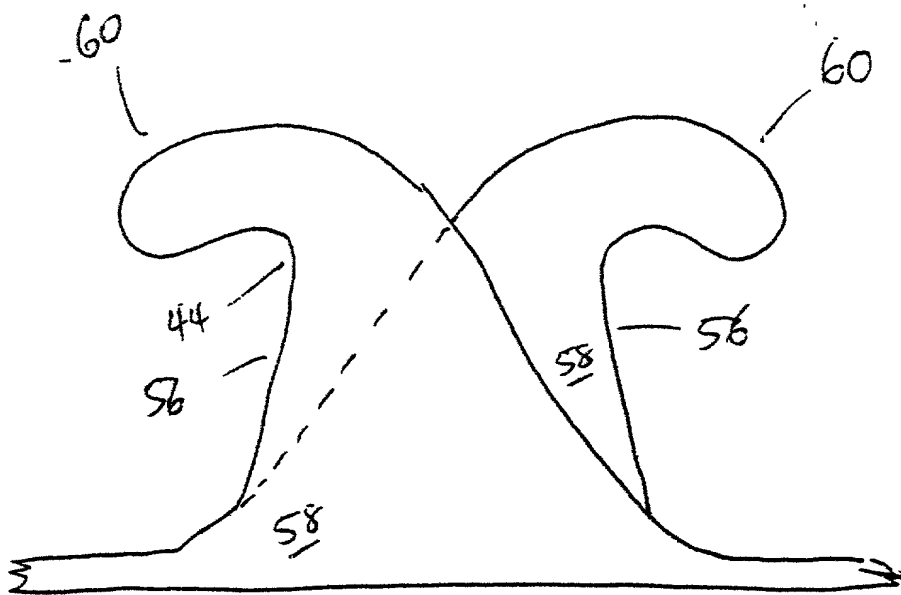


FIG. 2E

Mechanical Fastening Performance

Standard Peel Data

Two Hook Orientations

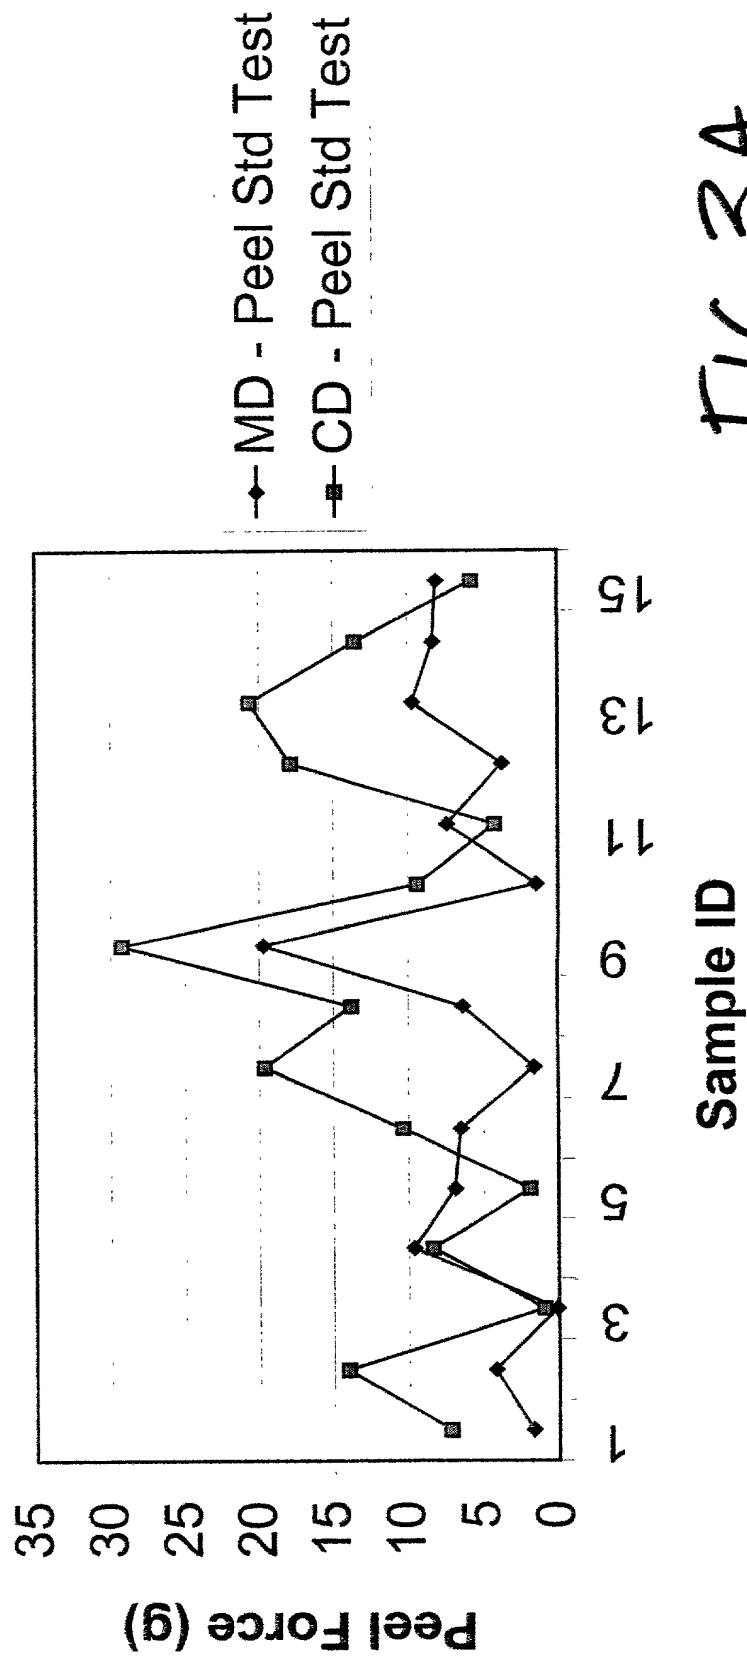


FIG. 3A

Mechanical Fastening Performance Standard Shear Force Two Hook Orientations

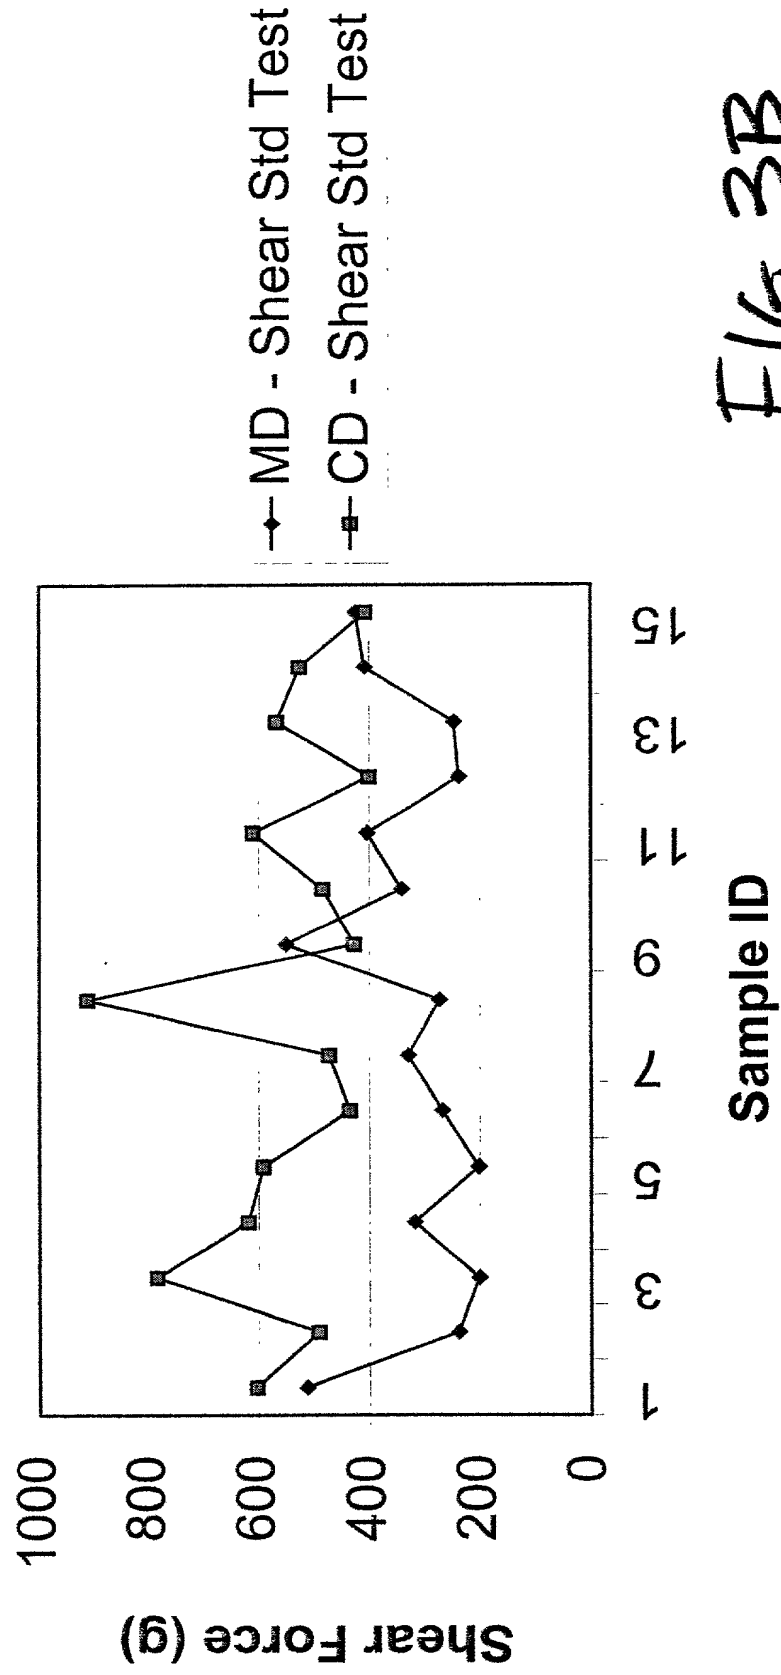


FIG. 3B

Mechanical Fastening Performance

Peel Force Post Wear

Two Hook Orientations

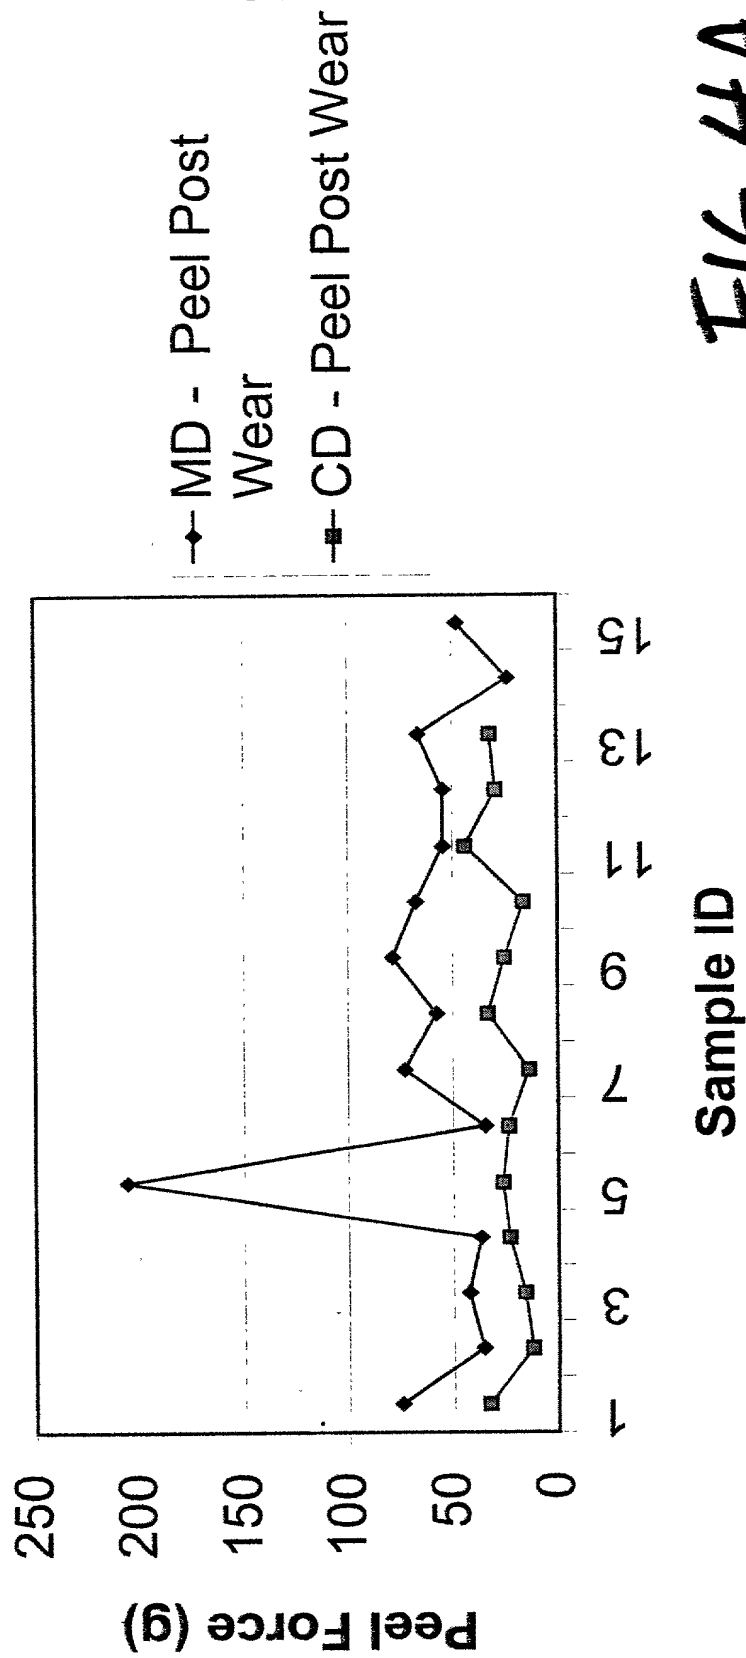


FIG. 4A

Mechanical Fastening Performance

Shear Force Post Wear

Two Hook Orientations

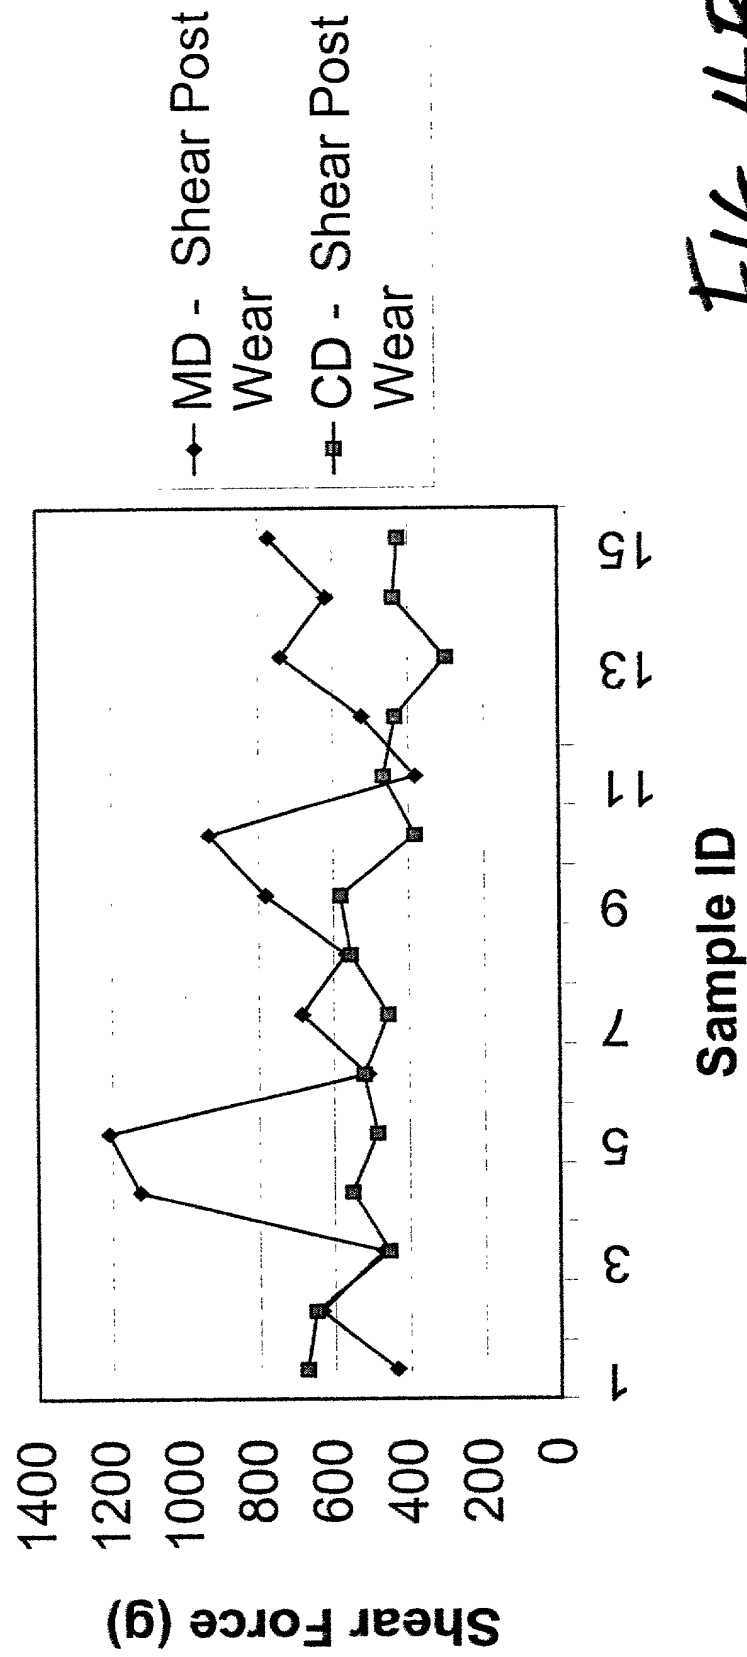


FIG. 4B



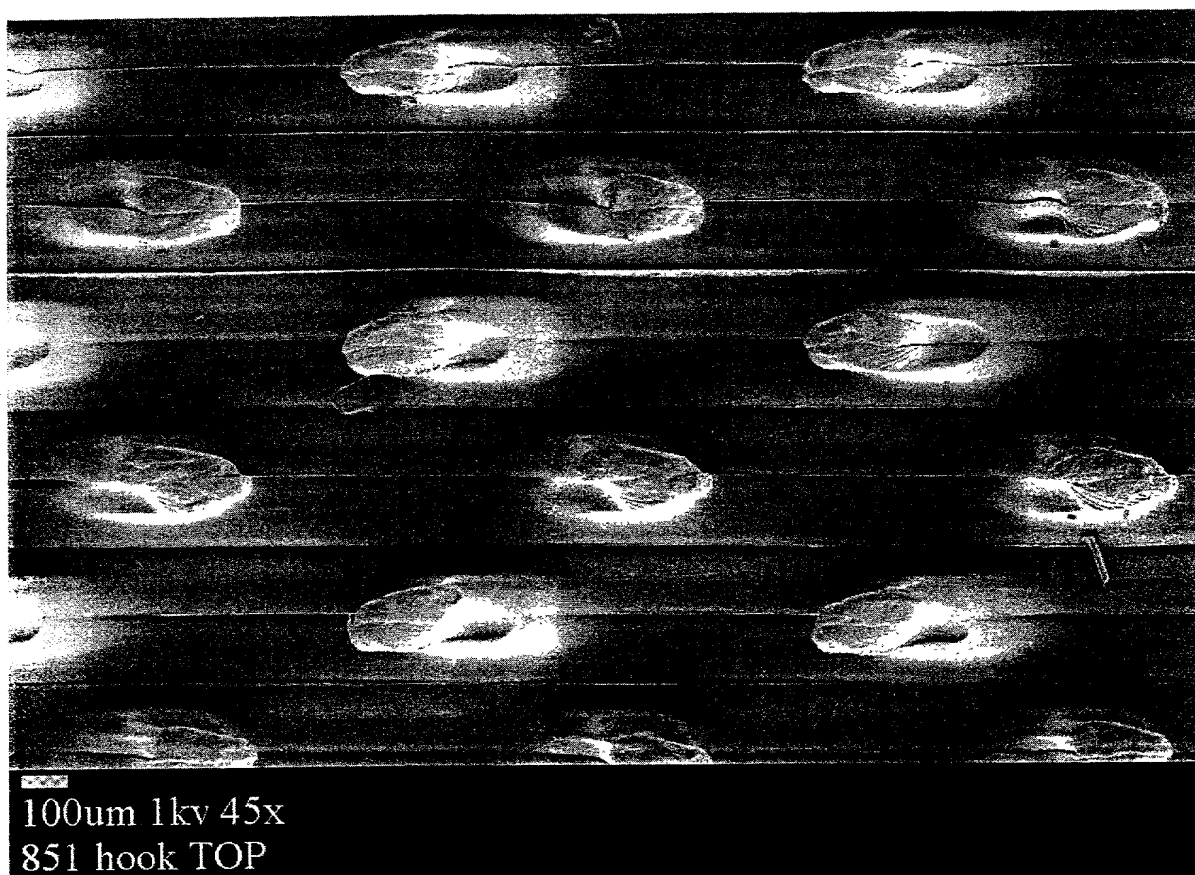


FIG. 5A

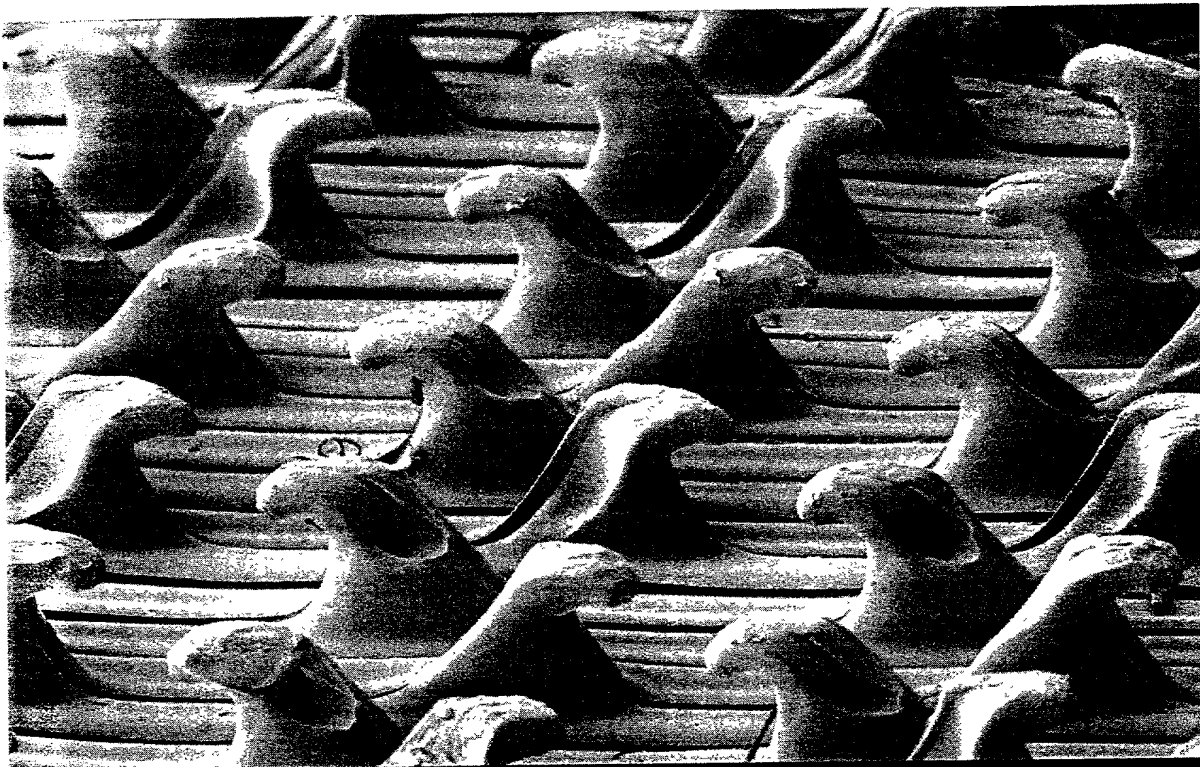


100um 1kv 50x
851 hook obl.

FIG. 5B

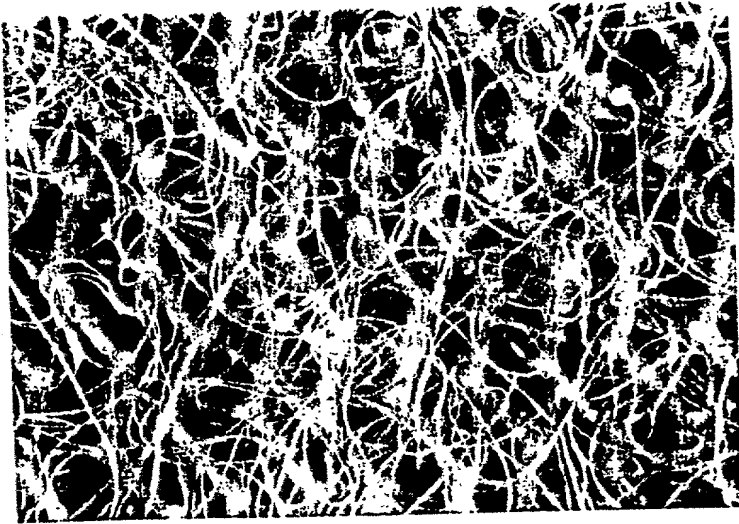

Guilford Woven Loop

FIG. 6

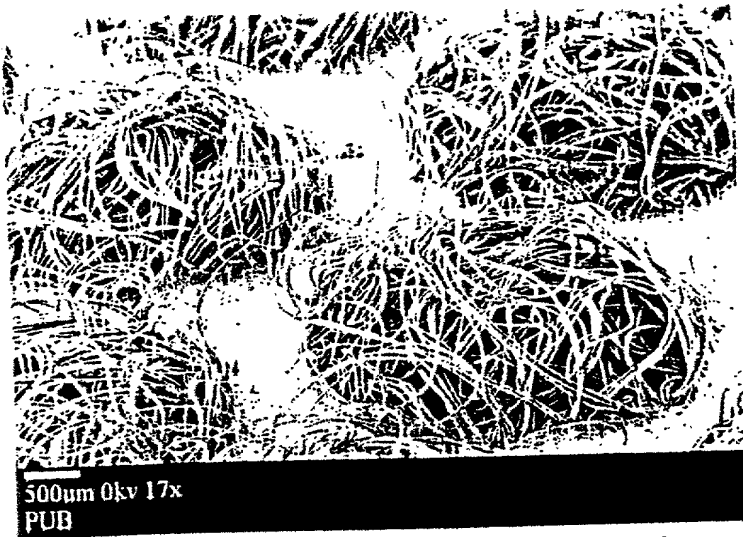

Nonwoven PUB Loop Dots

FIG. 7